

Code: 142-10



Golden  
World  
Trading  
Group

[www.GoldenWTG.org](http://www.GoldenWTG.org)

## QINGDAO FUTURE GROUP

### Model : QFG81

<b>Overall Dimension(mm)</b>		<b>2180×840×1250</b>
<b>Ground Clearance(mm)</b>		<b>210</b>
<b>Wheelbase(mm)</b>		<b>680~740</b>
<b>Weight(kg)</b>		<b>250</b>
<b>Semiaxis (cm)</b>		<b>340</b>
<b>Weight in use(with oil , water, tools) (kg)</b>		<b>300</b>
<b>Tyre Model</b>		<b>6.00~12</b>
<b>Tyre Pressure</b>	<b>Field Work</b>	<b>80~120</b>
	<b>Transportation Work</b>	<b>140~200</b>
<b>Power Connection</b>		<b>1000</b> <b>Two B1800 cone Belts</b>
<b>Engine</b>		<b>ZHR180N-2AQ/5.5kw/8hp/2300rpm</b>





**MODEL: QFG-111**



<b>Overall Dimension(mm)</b>	<b>2260×1030×1060</b>	
<b>Engine</b>	<b>SH192-2Q/7.35kw/11hp/2300rpm</b>	
<b>Ground Clearance (mm)</b>	<b>210</b>	
<b>Wheelbase(mm)</b>	<b>680~740</b>	
<b>Weight(kg)</b>	<b>321</b>	
<b>Semixaxis (cm)</b>	<b>340</b>	
<b>Weight in use(with oil , water, tools) (kg)</b>	<b>410</b>	
<b>Tyre Model</b>	<b>6.00~12</b>	
<b>Tyre Pressure</b>	<b>Field Work</b>	<b>100~120(1.0~1.2kgf/c m<sup>2</sup>)</b>
	<b>Transportation Work</b>	<b>180~200(1.8~2.0kgf/c m<sup>2</sup>)</b>
<b>Power Connection</b>	<b>1000 Three B1920 cone Belts</b>	

**MODEL: QFG-121**



<b>Overall Dimension(mm)</b>		<b>2260×1030×1060</b>
<b>Ground Clearance(mm)</b>		<b>210</b>
<b>Engine</b>		<b>ZH195A-2/ZH1100</b>
<b>Power</b>		<b>12 HP</b>
<b>Wheelbase(mm)</b>		<b>680~1200</b>
<b>Weight(kg)</b>		<b>325</b>
<b>Semixaxis cm</b>		<b>520-600</b>
<b>Weight in use(with oil , water, tools) (kg)</b>		<b>415</b>
<b>Tyre Model</b>		<b>6.00~14</b>
<b>Tyre Pressure</b>	<b>Field Work</b>	<b>100~120(1.0~1.2kgf/c)</b>
	<b>Transportation Work</b>	<b>180~200(1.8~2.0kgf/c)</b>
<b>Power Connection</b>		<b>1000 Three B1900 cone Belts</b>

**MODEL: QFG-151**



<b>Overall Dimension(mm)</b>	<b>2170×930×1150</b>	
<b>Ground Clearance(mm)</b>	<b>210</b>	
<b>Engine</b>	<b>ZH1100</b>	
<b>Power</b>	<b>15 HP</b>	
<b>Wheelbase(mm)</b>	<b>680~1200</b>	
<b>Weight(kg)</b>	<b>370</b>	
<b>Semixaxis cm</b>	<b>520-600</b>	
<b>Weight in use(with oil , water, tools) (kg)</b>	<b>430</b>	
<b>Tyre Model</b>	<b>6.00~16</b>	
<b>Tyre Pressure</b>	<b>Field Work</b>	<b>100~120(1.0~1.2kgf/c)</b>
	<b>Transportation Work</b>	<b>180~200(1.8~2.0kgf/c)</b>
<b>Power Connection</b>	<b>1040 Three B1900 cone Belts</b>	

## MODEL:QFG-181



<b>Overall Dimension(mm)</b>		<b>2500x935x1180</b>
<b>Ground Clearance(mm)</b>		<b>270</b>
<b>Engine</b>		<b>ZH1110</b>
<b>Power</b>		<b>18 HP</b>
<b>Wheelbase(mm)</b>		<b>680~1200</b>
<b>Weight(kg)</b>		<b>370</b>
<b>Semiaxis cm</b>		<b>520-600</b>
<b>Weight in use(with oil , water, tools) (kg)</b>		<b>450</b>
<b>Tyre Model</b>		<b>6.00~16</b>
<b>Tyre Pressure</b>	<b>Field Work</b>	<b>100~120(1.0~1.2kgf/c)</b>
	<b>Transportation Work</b>	<b>180~200(1.8~2.0kgf/c)</b>
<b>Power Connection</b>		<b>1040</b> <b>Three B1950 cone Belts</b>

## MODEL: QFG-DF121



<b>Engine</b>	<b>Pattern</b>	<b>Vertical, One Cylinder, Four Stroke, Diesel powered, Water-cooled</b>
	<b>Model</b>	<b>1100</b>
	<b>Displacement(L)</b>	<b>0.913</b>
	<b>Oil Consumption (g/ km. h)</b>	<b>≅320</b>
	<b>Engine Oil Consumption (g/ km. h)</b>	<b>≅2.72</b>
	<b>Rated Power(kw)</b>	<b>10.3</b>
	<b>Rated Speed(rpm)</b>	<b>2000</b>
<b>Machine Parameters</b>	<b>Type</b>	<b>Pull and Drive</b>
	<b>Overall Size(mm)</b>	<b>2680*960*1250(without seat)</b>
	<b>Wheel Tread(mm)</b>	<b>800</b>
	<b>Minimum Ground Clearance(mm)</b>	<b>185</b>
	<b>Minimum Turning Radius(m)</b>	<b>0.9</b>
	<b>Structural Weight(kg)</b>	<b>360 (with connecting frame), 480(with rotary tiller)</b>
	<b>Weight in use(with oil , water, tools) (kg)</b>	
	<b>Tyre</b>	<b>6.00-12</b>
	<b>Theoretical Speedl(km/h)</b>	<b>Forward:1.4,2.5,4.1,5.3,9.4,15.3 Reverse:1.0,3.8</b>
	<b>Rated Traction(N)</b>	<b>2400</b>
	<b>Gearbox</b>	<b>(3+1) ×2</b>
	<b>Oil Type</b>	<b>0# in summer,-10# or 20# in winter</b>
	<b>Cooling Type</b>	<b>Evaporation</b>
<b>Rear-Wheel Diameter(mm)</b>	<b>340</b>	

**MODEL: QFG-DF151**





<b>Engine</b>	<b>Pattern</b>	<b>Vertical, One Cylinder, Four Stroke, Diesel powered, Water-cooled</b>
	<b>Model</b>	<b>1105</b>
	<b>Displacement(L)</b>	<b>1.194</b>
	<b>Oil Consumption (g/ km. h)</b>	<b>≅ 320</b>
	<b>Engine Oil Consumption (g/ km. h)</b>	<b>≅ 2.72</b>
	<b>Rated Power(kw)</b>	<b>13.23</b>
	<b>Rated Speed(rpm)</b>	<b>2000</b>
<b>Machine Parameters</b>	<b>Type</b>	<b>Pull and Drive</b>
	<b>Overall Size(mm)</b>	<b>2680*960*1250(without seat)</b>
	<b>Wheel Tread(mm)</b>	<b>800</b>
	<b>Minimum Ground Clearance(mm)</b>	<b>185</b>
	<b>Minimum Turning Radius(m)</b>	<b>0.9</b>
	<b>Structural Weight(kg)</b>	<b>360 (with connecting frame), 480(with rotary tiller)</b>
	<b>Tyre</b>	<b>6.00-12</b>
	<b>Theoretical Speed (km/h)</b>	<b>Forward:1.4,2.5,4.1,5.3,9.4,15.3 Reverse:1.0,3.8</b>
	<b>Rated Traction(N)</b>	<b>2400</b>
	<b>Gearbox</b>	<b>(3+1) × 2</b>
	<b>Oil Type</b>	<b>0# in summer,-10 or 20 in winter</b>
	<b>Cooling Type</b>	<b>Evaporation</b>
	<b>Rear-Wheel Diameter (mm)</b>	<b>340</b>

**SPARE PARTS**

## TRAILER




## ROTOVATOR



## WATER PUMP



## WHEAT HARVESTER

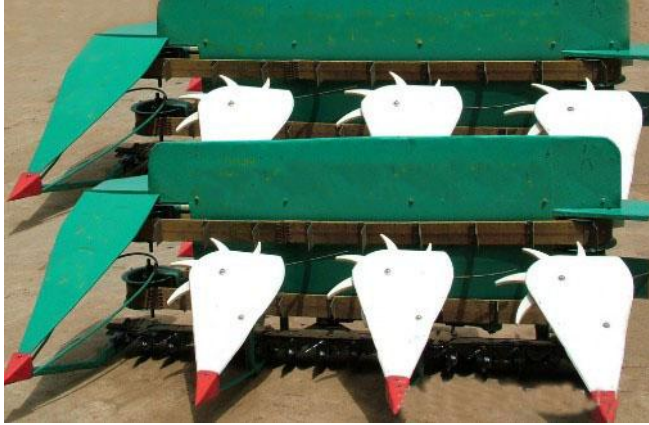

**ANTI-SKID WHEEL**



**SINGLE PLOUGH**



## **DOUBLE FURROW PLOUGH**



## **SEEDER**

