

Code: 142-11



Golden
World
Trading
Group

www.GoldenWTG.org

Agriculture Machinery

—— Walking Tractor

—— SH Walking Tractor 7-20HP *P2—P23*

- SH75
- SH81
- SH101-1J, SH101-2
- SH121
- SH151
- SH181
- SH201

—— DF Walking Tractor 15-18HP *P24—P25*

- DF151
- DF181

—— Walking Tractor Chassis *P26—P30*

- Horizontal Transmission Chassis
- Vertical Transmission Chassis

—— Walking Tractor Diesel Engine *P31*

—— Walking Tractor Implement *P32—P45*

- Rotary Tiller
- Furrow Plough
- Disc Plough
- Anti-Skid Wheel
- Trailer
- Seeder
- Mower
- Rake
- Generator
- Water Pump

Walking Tractor

手扶拖拉机系列

— SH75



SH75 (7HP)



7HP Diesel Engine

Air-Cooling System

Horizontal Transmissio

Tire 600-12

with **Single Plough**

7HP Diesel Engine

Air-Cooling System

Electric Start

Horizontal Transmission

Tire 600-12



Walking Tractor

手扶拖拉机系列

— SH75



SH75 (7HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	75
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2150×920×1250
	Tread	mm	500-700
	Min. Ground Clearance	mm	190
	Weight(in use)	kg	373
	Ballast	kg	43
	Gear (Front/Rear)	/	3/1
	Theoretical Speed	km/h	Front I 2.5 II 5.8 III 15.9 Rear I 2.04
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
Engine	Brand	/	SH
	Pattern	/	Single, Horizontal, Water-cooled, Four strokes and Eddy
	Model	/	SH175-AQ
	Cylinder		1
	Bore × Stroke	mm	85×90
	Displacement	L	0.510
	Compression Ratio	/	21:1
	Rated Power	kW	5.15 (7HP)
	Rated Speed	r/min	2200
	Injection Type&Model	/	Monomer piston type BF1A70Z01
	Nozzle Type&Model	/	Single-arch shaft needle PB40S
	Air filter Type&Model	/	Secondary Oil Bath
Cooling Type	/	Water-cooled	
Front Light	Model	/	C201-006
Fuel Tank	Model	/	185-11100
	Pressure	kPa	100-120
	Volume	L	9.1
Muffler	Muffler Dimension (L×W×D×L)	mm	φ110×193
	Weight	kg	1.03
Transmission	Clutch	/	Single-stage clutch
	Gear box	/	3+1
Tyre	Model(Front/Rear)	/	6.00-12 (GB1192)
	Pressure(Front/Rear)	kPa	Farm: 80-120KPa Transportation: 140-200KPa

Walking Tractor

手扶拖拉机系列

— SH81



SH81 (8HP)



8HP Diesel Engine

Air-Cooling System

Electric Start

Horizontal Transmission

Tire 600-12

with **Rotary Tiller**

8HP Diesel Engine

Air-Cooling System

Horizontal Transmission

Tire 600-12

with **Rotary Tiller**



Walking Tractor

手扶拖拉机系列

— SH81



SH81 (8HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	81-1
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2150×920×1250
	Tread	mm	500-700
	Min. Ground Clearance	mm	190
	Weight(in use)	kg	373
	Ballast	kg	43
	Gear (Front/Rear)	/	3/1
	Theoretical Speed	km/h	Front I 2.5 II 5.8 III 15.9 Rear I 2.04
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
Engine	Brand	/	SH
	Pattern	/	Single, Horizontal, Water-cooled, Four strokes and Eddy
	Model	/	SH180-AQ
	Cylinder		1
	Bore × Stroke	mm	85×90
	Displacement	L	0.510
	Compression Ratio	/	21:1
	Rated Power	kW	5.88 (8HP)
	Rated Speed	r/min	2200
	Injection Type&Model	/	Monomer piston type BF1A70Z01
	Nozzle Type&Model	/	Single-arch shaft needle PB40S
	Air filter Type&Model	/	Secondary Oil Bath
Cooling Type	/	Water-cooled	
Front Light	Model	/	C201-006
Fuel Tank	Model	/	185-11100
	Pressure	kPa	100-120
	Volume	L	9.1
Muffler	Muffler Dimension (L×W×D×L)	mm	φ110×193
	Weight	kg	1.03
Transmission	Clutch	/	Single-stage clutch
	Gear box	/	3+1
Tyre	Model(Front/Rear)	/	6.00-12 (GB1192)
	Pressure(Front/Rear)	kPa	Farm: 80-120KPa Transportation: 140-200KPa

Walking Tractor

手扶拖拉机系列

— SH101-1J



SH101-1J (10HP)



10HP Diesel Engine

Water-cooled System

Horizontal Transmissio

Tire 600-12

10HP Diesel Engine

Water-cooled System

Horizontal Transmission

Tire 600-12



Walking Tractor

手扶拖拉机系列

— SH101-1J



SH101-1J (10HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	101-1J
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2140×905×1090
	Tread	mm	680-740
	Min. Ground Clearance	mm	210
	Weight(in use)	kg	363
	Ballast	kg	43
	Gear (Front/Rear)	/	6/2
	Theoretical Speed	km/h	Front I 2.2 II 3.42 III 5.53 IV 8.92 V 13.87 VI 22.43 Rear I 1.69 II 6.86
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
	Engine	Brand	/
Pattern		/	Single, Horizontal, Water-cooled, Four strokes and Eddy
Model		/	SH190
Cylinder			1
Bore × Stroke		mm	92×90
Displacement		L	0.598
Compression Ratio		/	21:1
Rated Power		kW	7.35 (10HP)
Rated Speed		r/min	2300
Injection Type&Model		/	Monomer piston type BF1A75Z01
Nozzle Type&Model		/	Single-arch shaft needle PB40S
Air filter Type&Model		/	Secondary Oil Bath
Cooling Type		/	Water-cooled
Front Light	Model	/	C201-006
Fuel Tank	Model	/	185-11100
	Pressure	kPa	100-120
	Volume	L	9.1
Muffler	Muffler Dimension (L×W×D×L)	mm	φ110×193
	Weight	kg	1.03
Transmission	Clutch	/	Single stage
	Gear box	/	(3+1) ×2
Tyre	Model(Front/Rear)	/	6.00-12 (GB1192-82)
	Pressure(Front/Rear)	kPa	Farm: 80-120KPa Transportation: 140-200KPa

Walking Tractor
手扶拖拉机系列
—— SH101-2



SH101-2 (10HP)



- 10HP Diesel Engine
- Water-cooled System
- Horizontal Transmissio
- Tire 600-12

- 10HP Diesel Engine
- Water-cooled System
- Horizontal Transmission
- Tire 600-12



Walking Tractor

手扶拖拉机系列

— SH101-2



SH101-2 (10HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	101-2
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2180×910×1060
	Tread	mm	680-740
	Min. Ground Clearance	mm	210
	Weight(in use)	kg	360
	Ballast	kg	43
	Gear (Front/Rear)	/	6/2
	Theoretical Speed	km/h	Front I 2.2 II 3.42 III 5.53 IV 8.92 V 13.87 VI 22.43 Rear I 1.69 II 6.86
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
	Engine	Brand	/
Pattern		/	Single, Horizontal, Water-cooled, Four strokes and Eddy
Model		/	SH190
Cylinder			1
Bore × Stroke		mm	92×90
Displacement		L	0.598
Compression Ratio		/	21:1
Rated Power		kW	7.35 (10HP)
Rated Speed		r/min	2200
Injection Type&Model		/	Monomer piston type BF1A75Z01
Nozzle Type&Model		/	Single-arch shaft needle PB40S
Air filter Type&Model		/	Secondary Oil Bath
Cooling Type		/	Water-cooled
Model	/	C201-006	
Fuel Tank	Model	/	185-11100
	Pressure	kPa	100-120
	Volume	L	9.1
Muffler	Muffler Dimension (L×W×D×L)	mm	φ110×193
	Weight	kg	1.03
Transmission	Clutch	/	Single stage
	Gear box	/	(3+1) ×2
Tyre	Model(Front/Rear)	/	6.00-12 (GB1192-82)
	Pressure(Front/Rear)	kPa	Farm: 80-120KPa Transportation: 140-200KPa

Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP)



12HP Diesel Engine

Water-cooled System

Horizontal Transmissio

Tire 600-12

12HP Diesel Engine

Water-cooled System

Horizontal Transmission

Tire 600-12



Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP)



12HP Diesel Engine

Air-Cooling System

Horizontal Transmissio

Tire 600-12

with **Single Plough**

12HP Diesel Engine

Air-Cooling System

Horizontal Transmission

Tire 600-12

with **Rotary Tiller**



Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP)



12HP Diesel Engine

Air-Cooling System

Electric Start

Horizontal Transmissio

Tire 600-12



Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP)



12HP Diesel Engine

Air-Cooling System

Electric Start

Horizontal Transmissio

Tire 600-16



Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP)



12HP Diesel Engine

Air-Cooling System

Electric Start

Horizontal Transmissio

Tire 600-16

with Rotary Tiller



Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	121-3
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2230×950×1130
	Tread	mm	680-760
	Min. Ground Clearance	mm	210
	Weight(in use)	kg	426
	Ballast	kg	43
	Gear (Front/Rear)	/	6/2
	Theoretical Speed	km/h	Front I 2.21 II 4.28 III 6.64 IV 8.22 V 14.63 VI 24.5 Rear I 1.75 II 6.49
	Power connection	/	V-Belts
	Start Type	/	Hand
	Engine	Brand	/
Pattern		/	Single, Horizontal, Water-cooled, Four strokes and Eddy
Model		/	SH195A
Cylinder			1
Bore × Stroke		mm	95×100
Displacement		L	0.709
Compression Ratio		/	21:1
Rated Power		kW	8.10 (12HP)
Rated Speed		r/min	2200
Injection Type&Model		/	Monomer piston type BF1A80Z01
Nozzle Type&Model		/	Single-arch shaft needle PB40S
Air filter Type&Model		/	Secondary Oil Bath
Cooling Type		/	Water-cooled
Front Light	Model	/	C201-006
Fuel Tank	Model	/	195A-11100
	Pressure	kPa	100-120
	Volume	L	11
Muffler	Muffler Dimension (L×W×D×L)	mm	φ138×190
	Weight	kg	1.43
Transmission	Clutch	/	Single stage
	Gear box	/	(3+1) ×2
Tyre	Model(Front/Rear)	/	6.00-12 four layers ,R-1
	Pressure(Front/Rear)	kPa	Farm: 100-120KPa Transportation: 180-200KPa

Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP) Vertical Transmission



12HP Diesel Engine

Air-Cooling System

Vertical Transmission

Tire 600-12

with Rotary Tiller



Walking Tractor

手扶拖拉机系列

— SH121



SH121 (12HP) Vertical Transmission



12HP Diesel Engine

Water-cooled System

Vertical Transmission

Tire 600-12



Walking Tractor

手扶拖拉机系列

— SH151



SH151 (15HP)



15 HP Diesel Engine

Water-Cooled System

Horizontal Transmissio

Tire 600-12



Walking Tractor 手扶拖拉机系列 —— SH151



SH151 (15HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	151-3
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2200×1035×1190
	Tread	mm	580, 640, 740, 800
	Min. Ground Clearance	mm	190
	Weight(in use)	kg	476
	Ballast	kg	
	Gear (Front/Rear)	/	6/2
	Theoretical Speed	km/h	Front I 2.06 II 3.65 III6.14 IV7.61 V 13.53 VI22.71 Rear I 1.63 II 6.01
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
Engine	Brand	/	SH
	Pattern	/	Single, Horizontal, Water-cooled, Four strokes and Direct-Injection
	Model	/	ZH1100
	Cylinder		1
	Bore × Stroke	mm	100×115
	Displacement	L	0.903
	Compression Ratio	/	17:1
	Rated Power	kW	11.03 (15HP)
	Rated Speed	r/min	2200
	Injection Type&Model	/	Monomer Rack Pump type BF1A85Z01
	Nozzle Type&Model	/	Long Porous PF68S07
	Air filter Type&Model	/	Secondary Oil Bath
Cooling Type	/	Water-cooled, Evaporation	
Front Light	Model	/	C201-006
Fuel Tank	Model	/	ZH1100-07500
	Pressure	kPa	100-120
	Volume	L	12
Muffler	Muffler Dimension (L×W×D×L)	mm	φ148×188
	Weight	kg	1.6
Transmission	Clutch	/	Dual-stage
	Gear box	/	(3+1) ×2
Tyre	Model(Front/Rear)	/	6.00-12 four layers ,R-1
	Pressure(Front/Rear)	kPa	Farm: 100-120KPa Transportation: 180-200KPa

Walking Tractor

手扶拖拉机系列

— SH181



SH181 (18HP)



18 HP Diesel Engine

Water-Cooled System

Horizontal Transmission

Tire 600-16



Walking Tractor

手扶拖拉机系列

— SH181



SH181 (18HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	181-1
	Type	/	Farm and Transportation
	Dimension(L×W×H)	mm	2330×1260×1250
	Tread	mm	680-1000
	Min. Ground Clearance	mm	250
	Weight(in use)	kg	553
	Gear (Front/Rear)	/	6/2
	Theoretical Speed	km/h	Front I 2.55 II 4.94 III 7.68 IV 9.5 V 16.9 VI 28.3 Rear I 2.03 II 7.5
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
Engine	Brand	/	SH
	Pattern	/	Single, Horizontal, Water-cooled, Four strokes and Direct-Injection
	Model	/	ZH1110
	Cylinder		1
	Bore × Stroke	mm	100×115
	Displacement	L	0.903
	Compression Ratio	/	17:1
	Rated Power	kW	13.23 (18HP)
	Rated Speed	r/min	2200
	Injection Type&Model	/	Monomer Rack Pump type BF1A85Z01
	Nozzle Type&Model	/	Single-arch shaft needle PF68S07
	Air filter Type&Model	/	Secondary Oil Bath
	Cooling Type	/	Water-cooled, Evaporation
Front Light	Model	/	C201-006
Fuel Tank	Model	/	ZH1100-07500
	Pressure	kPa	100-120
	Volume	L	12
Muffler	Muffler Dimension (L×W×D×L)	mm	φ148×188
	Weight	kg	1.6
Transmission	Clutch	/	Single stage
	Gear box	/	(3+1) ×2
Tyre	Model(Front/Rear)	/	6.00-16 four layers ,R-1
	Pressure(Front/Rear)	kPa	Farm: 100-120KPa Transportation: 180-200KPa

Walking Tractor

手扶拖拉机系列

— SH201



SH201 (20HP)



20 HP Diesel Engine

Water-Cooled System

Horizontal Transmissio

Tire 600-16

Air-Cooling System



Walking Tractor

手扶拖拉机系列

— SH201



SH201 (20HP)

	Item	Unit	Data
The Whole	Brand	/	SH
	Model	/	201
	Type	/	Farm and Transportation
	Dimmension(L×W×H)	mm	2500×1035×1190
	Tread	mm	580, 640, 740, 800
	Min. Ground Clearance	mm	250
	Weight(in use)	kg	563
	Ballast	kg	
	Gear (Front/Rear)	/	6/2
	Theoretical Speed	km/h	Front I 2.55 II 4.94 III 7.68 IV 9.5 V 16.9 VI 28.3 Rear I 2.03 II 7.5
	Power connection	/	V-Belts
	Start Type	/	Hand swaying startup
Engine	Brand	/	SH
	Pattern	/	Single, Horizontal, Water-cooled, Four strokes and Direct-Injection
	Model	/	ZH1115
	Cylinder		1
	Bore × Stroke	mm	100×115
	Displacement	L	0.903
	Compression Ratio	/	17:1
	Rated Power	kW	14.7 (20HP)
	Rated Speed	r/min	2200
	Injection Type&Model	/	Monomer Rack Pump type BF1A85Z01
	Nozzle Type&Model	/	Long Porous PF68S07
	Air filter Type&Model	/	Secondary Oil Bath
	Cooling Type	/	Water-cooled, Evaporation
Front Light	Model	/	C201-006
Fuel Tank	Model	/	ZH1100-07500
	Pressure	kPa	100-120
	Volume	L	12
Muffler	Muffler Dimension (L×W×D×L)	mm	φ148×188
	Weight	kg	1.6
Transmission	Clutch	/	Dual-stage
	Gear box	/	(3+1) ×2
Tyre	Model(Front/Rear)	/	6.00-16 four layers ,R-1
	Pressure(Front/Rear)	kPa	Farm: 100-120KPa Transportation: 180-200KPa

Walking Tractor

手扶拖拉机系列

—— DF151



DF151 (15HP)



15 HP Diesel Engine

Air-cooling System

Horizontal Transmission

Tire 600-12

with Rotary Tiller



Walking Tractor 手扶拖拉机系列

— DF181



DF181 (18HP)



18 HP Diesel Engine

Air-cooling System

Horizontal Transmission

Tire 600-16

with Rotary Tiller



Walking Tractor Chassis

手扶拖拉机底盘



Chassis Storage



Walking Tractor Chassis 手扶拖拉机底盘



Chassis Storage



Walking Tractor Chassis

手扶拖拉机底盘



Chassis Storage




Walking Tractor Vertical Chassis

手扶拖拉机立式底盘



Chassis Storage

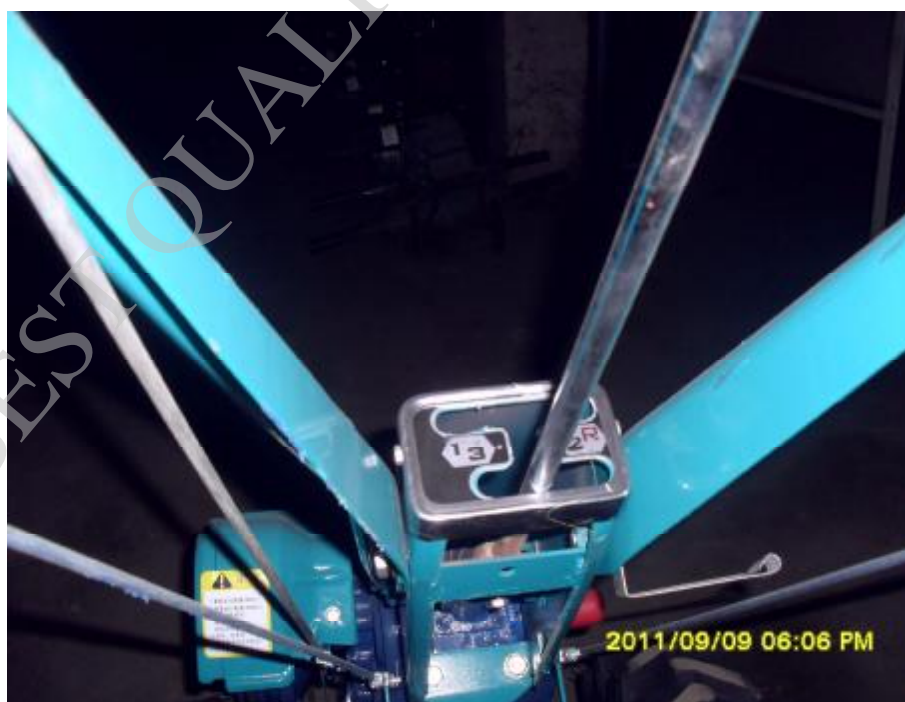

Walking Tractor Vertical Chassis 手扶拖拉机立式底盘



Chassis Storage



Walking Tractor Diesel Engine 手扶拖拉机柴油机



Diesel Engine Storage



Walking Tractor Implement 手扶拖拉机农具 ——Rotary Tiller



Rotary Tiller for SH 7-8HP



Walking Tractor Implement 手扶拖拉机农具 ——Rotary Tiller



Rotary Tiller for SH 7-8HP



Walking Tractor Implement

手扶拖拉机农具
——Rotary Tiller



Rotary Tiller for SH 10-12HP



Walking Tractor Implement 手扶拖拉机农具 ——Rotary Tiller



Rotary Tiller for SH 10-12HP



Walking Tractor Implement
手扶拖拉机农具
——**Rotary Tiller**



Rotary Tiller for SH 15-20HP



Walking Tractor Implement 手扶拖拉机农具 ——Rotary Tiller



Rotary Tiller for DF Walking Tractors



Walking Tractor Implement 手扶拖拉机农具 ——Rotary Tiller



Rotary Tiller for Vertical Transimission Walking Tractors



BEST QUALITY, BEST SERVICE

Walking Tractor Implement 手扶拖拉机农具 ——Plough



Plough



Walking Tractor Implement
手扶拖拉机农具
——**Disc Plough**



Disc Plough



Walking Tractor Implement

手扶拖拉机农具

—Anti-Skid Wheel



Anti-Skid Wheel



Walking Tractor Implement

手扶拖拉机农具
——Trailer



Trailer



Walking Tractor Implement 手扶拖拉机农具 ——Seeder



Seeder



Walking Tractor Implement 手扶拖拉机农具 ——Mower



Mower



Walking Tractor Implement

手扶拖拉机农具
—Others



Others



Rake

Generator



Water Pump